

SMRR 8500 MG J

Retro Reflective

Photoelectric Sensors



Product Data	
Function	Both
Operation Mode	Retro Reflective
Supply Voltage	10 - 30 V dc
Control Feature	Sensitivity pot. and light/dark switch
Connection	4 pin, M12 plug
Sensing Range	3 m
Output	PNP
Output Status	N.C./N.O.
Light Source	Infrared (880 nm)
Housing Material	Stainless Steel
Housing	M18 x 1

Technical Data	
Supply Voltage	10 - 30 V dc
Voltage Ripple	15 %
Reverse Polarity Protected	Yes
Short Circuit Protected	Yes
Current Consumption	14 mA
Max. Output Load	120 mA / 30 V dc
Max. Residual Voltage	1,5 V
Max. Operation Frequency	250 Hz
Response Time ton / toff	2 ms / 2 ms
Power On Indicator	Green LED
Output Indicator	Yellow LED
Hysteresis	Approx. 5 - 15 %
Opening Angle	+/- 3,5°
Housing Material, Front Lens	Polycarbonate
Housing Material, Sensor Housing	Stainless Steel (AISI 316 / 1.4401)

Cable	3 x 0,14 mm²
Cable Sleeve	PVC Ø 4,0 mm


Environmental Data

Vibration	10 - 55 Hz, 0,5 mm
Shock	30 g
Operation Temperature	-20 to +60 °C
Storage Temperature	-40 to +80 °C
Sealing Class	IP 67
Light Immunity 15'	> 25 000 lux


Approvals




Wiring Diagram

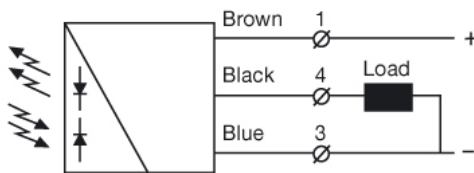

Connections

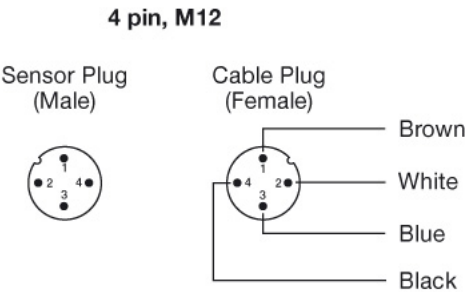

Parallel Displacement

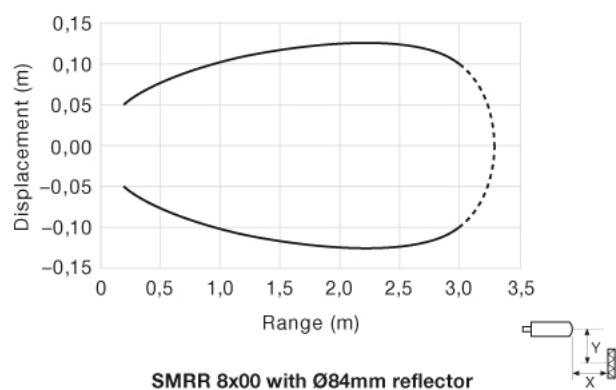

Dimensions

