

## SMT 3000HC AP 5

## Thru Beam

Photoelectric Sensors

## Compatible Receivers:

SMR 3015 AP 5

SMR 3115 AP 5

SMR 3215 AP 5

SMR 3315 AP 5



Product Data	
Function	Transmitter
Operation Mode	Thru Beam
Supply Voltage	10 - 30 V dc
Control Feature	Adjustable range and test input
Connection	5 m cable
Sensing Range	15 m
Light Source	Infrared (880 nm)
Housing Material	Plastic
Housing	Ø10

Technical Data	
Supply Voltage	10 - 30 V dc
Voltage Ripple	15 %
Reverse Polarity Protected	Yes
Current Consumption	Max. 30 mA
Test Input	Yes
Control Input	Adjustable range
Power On Indicator	Green LED
Light Source	Infrared (880 nm)
Emission Angle	+/- 12°
Housing Material, Front Lens	Polycarbonate
Housing Material, Sensor Housing	Polycarbonate
Cable	3 x 0,14 mm <sup>2</sup>
Cable Sleeve	PVC Ø 3,4 mm


Environmental Data	
Vibration	10 - 55 Hz, 0,5 mm
Shock	30 g

Operation Temperature	-20 to +50 °C
Storage Temperature	-40 to +80 °C
Sealing Class	IP 67


Approvals




Wiring Diagram

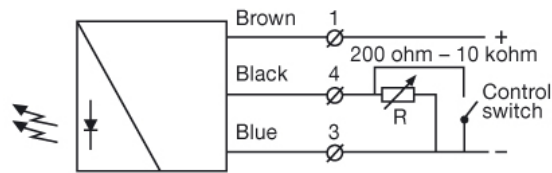

Parallel Displacement

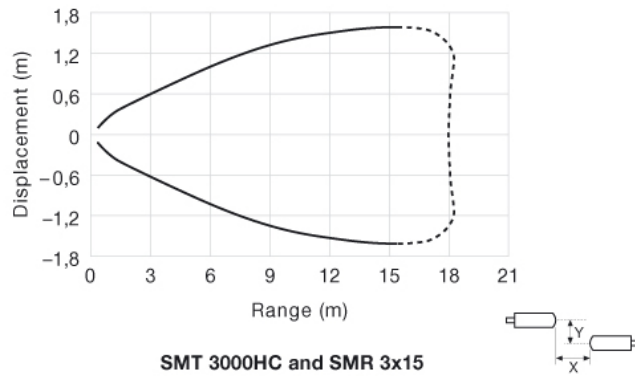

Angular Displacement

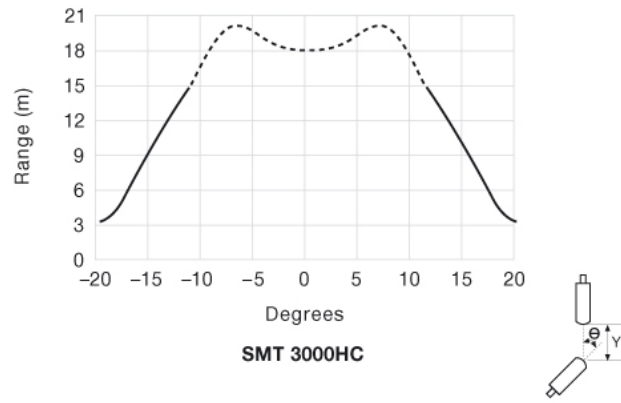

Dimensions

