

SMT 3000HC SG 5

Thru Beam

Photoelectric Sensors

Compatible Receivers:

SMR 3315 SG 5

SMR 3015 SG 5

SMR 3115 SG 5

SMR 3215 SG 5



Product Data	
Function	Transmitter
Operation Mode	Thru Beam
Supply Voltage	10 - 30 V dc
Control Feature	Adjustable range and test input
Connection	5 m cable
Sensing Range	15 m
Light Source	Infrared (880 nm)
Housing Material	Plastic
Housing	9,5 x 11,5

Technical Data	
Supply Voltage	10 - 30 V dc
Voltage Ripple	15 %
Reverse Polarity Protected	Yes
Current Consumption	Max. 30 mA
Test Input	Yes
Control Input	Adjustable range
Light Source	Infrared (880 nm)
Emission Angle	+/- 12°
Housing Material, Front Lens	Polycarbonate
Housing Material, Sensor Housing	Polyester
Cable	3 x 0,14 mm ²
Cable Sleeve	PVC Ø 3,4 mm


Environmental Data	
Vibration	10 - 55 Hz, 0,5 mm
Shock	30 g
Operation Temperature	-20 to +50 °C

Storage Temperature	-40 to +80 °C
Sealing Class	IP 67


Approvals




Wiring Diagram

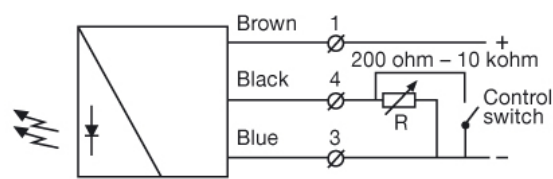


Parallel Displacement

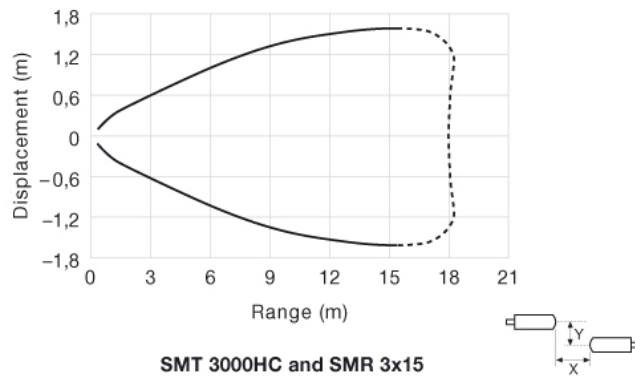


Angular Displacement

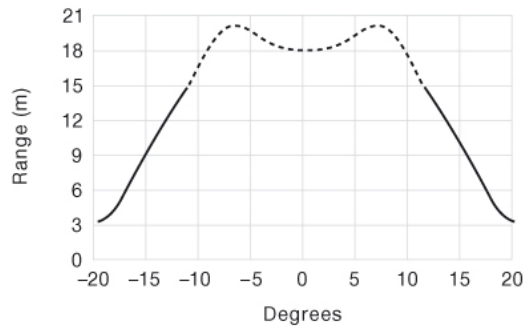

SMT 3000HC



Dimensions

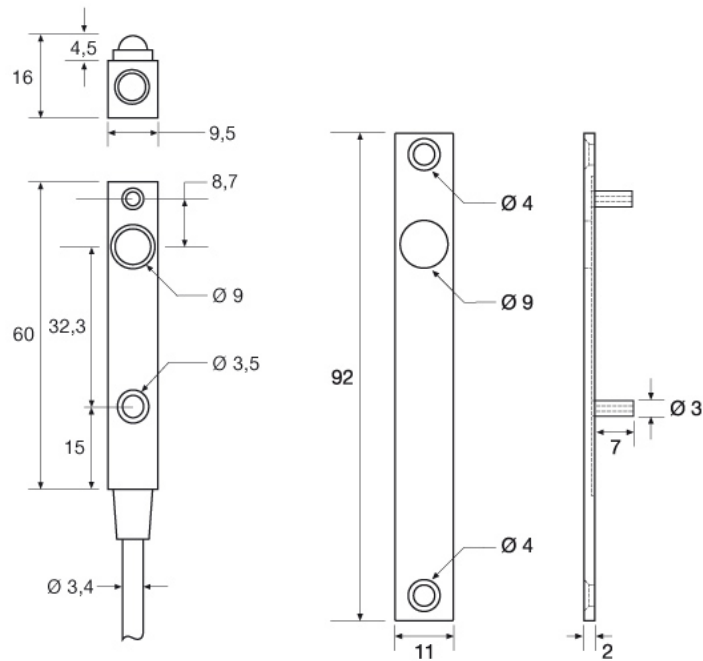

Mounting Front Plate Accessory (Included)