

## SMT 3012C TB 5

## Thru Beam

Photoelectric Sensors

## Compatible Receivers:

SMR 3012 TB 5

SMR 3112 TB 5

SMR 3212 TB 5

SMR 3312 TB 5



Product Data	
Function	Transmitter
Operation Mode	Thru Beam
Supply Voltage	10 - 30 V dc
Control Feature	Adjustable range and test input
Connection	5 m cable
Sensing Range	12 m
Light Source	Infrared (880 nm)
Housing Material	Nickel Plated Brass
Housing	M12 x 1

Technical Data	
Supply Voltage	10 - 30 V dc
Voltage Ripple	15 %
Reverse Polarity Protected	Yes
Current Consumption	Max. 30 mA
Test Input	Yes
Control Input	Adjustable range
Power On Indicator	Green LED
Light Source	Infrared (880 nm)
Emission Angle	+/- 5°
Housing Material, Front Lens	Polycarbonate
Housing Material, Sensor Housing	Nickel Plated Brass
Cable	3 x 0,14 mm <sup>2</sup>
Cable Sleeve	PVC Ø 3,4 mm


Environmental Data	
Vibration	10 - 55 Hz, 0,5 mm
Shock	30 g

Operation Temperature	-20 to +50 °C
Storage Temperature	-40 to +80 °C
Sealing Class	IP 67


Approvals




Wiring Diagram

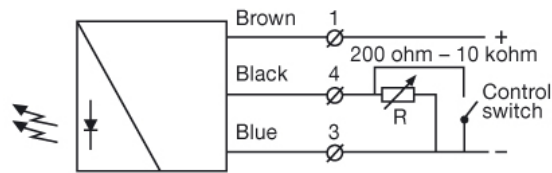


Parallel Displacement

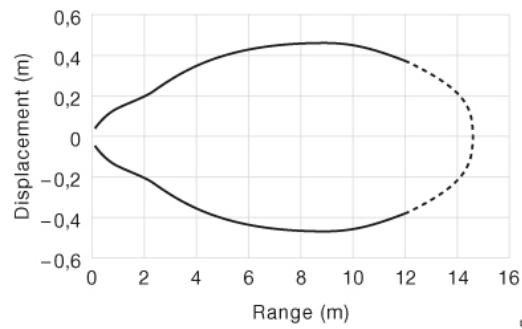


SMT 3012 and SMR 3x12



Angular Displacement

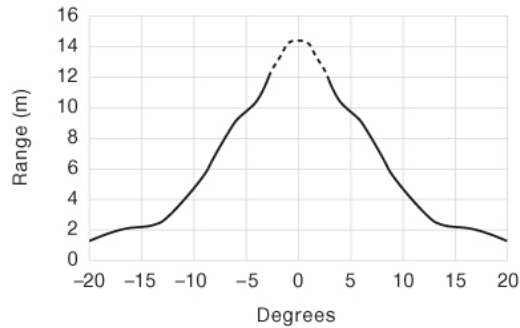

SMT 3012C



Dimensions

