

SMT 9070C TP 15

Thru Beam

Photoelectric Sensors

Compatible Receivers:

SMR 9070 TP 15
 SMR 9170 TP 15
 SMR 9270 TP 15
 SMR 9370 TP 15
 SMR 9471 TP 15
 SMR 9472 TP 15
 SMR 9473 TP 15
 SMR 9474 TP 15





Product Data	
Function	Transmitter
Operation Mode	Thru Beam
Supply Voltage	10 - 30 V dc
Control Feature	Adjustable range and test input
Connection	15 m cable
Sensing Range	70 m
Light Source	Infrared (880 nm)
Housing Material	Plastic
Housing	M18 x 1

Technical Data	
Supply Voltage	10 - 30 V dc
Voltage Ripple	15 %
Reverse Polarity Protected	Yes
Current Consumption	40 mA
Test Input	Yes
Control Input	Adjustable range
Power On Indicator	Green LED
Light Source	Infrared (880 nm)
Emission Angle	+/- 4°
Housing Material, Front Lens	Polycarbonate
Housing Material, Sensor Housing	Polycarbonate
Cable	5 x 0,14 mm²
Cable Sleeve	PVC Ø 4,9 mm
Channel N°	Selectable 4 channels


Environmental Data	
Vibration	10 - 55 Hz, 0,5 mm
Shock	30 g
Operation Temperature	-20 to +60 °C
Storage Temperature	-40 to +80 °C
Sealing Class	IP 69K

Approvals




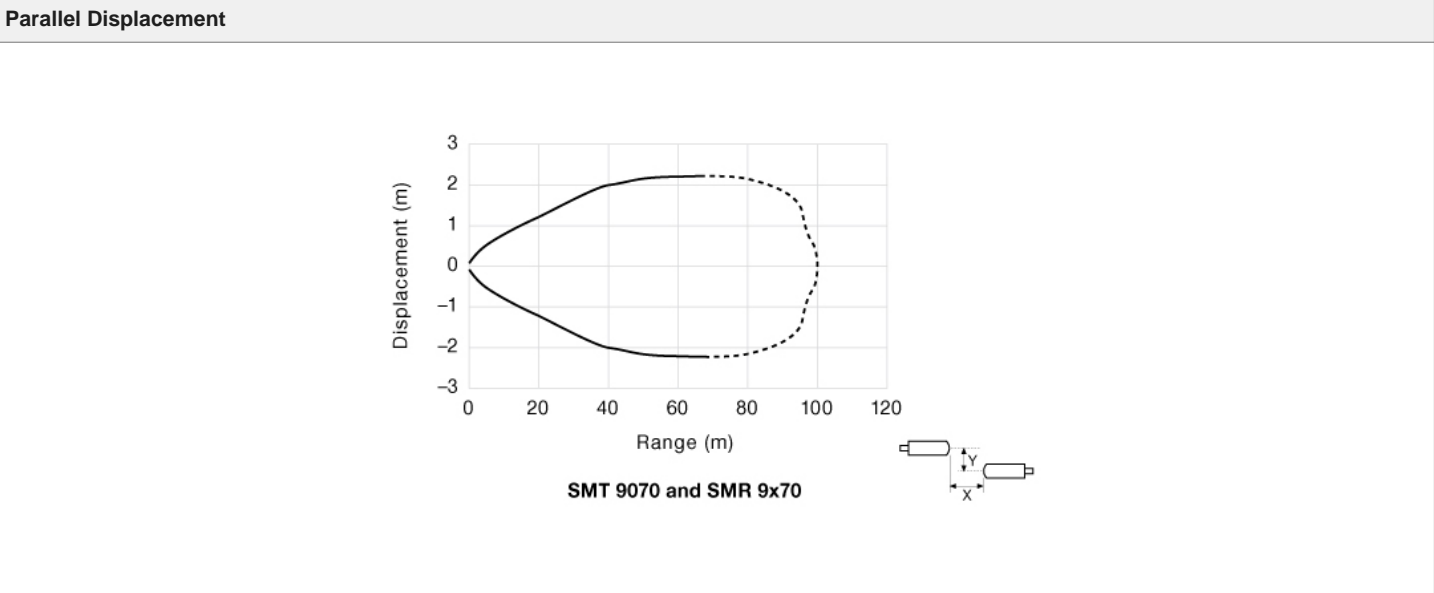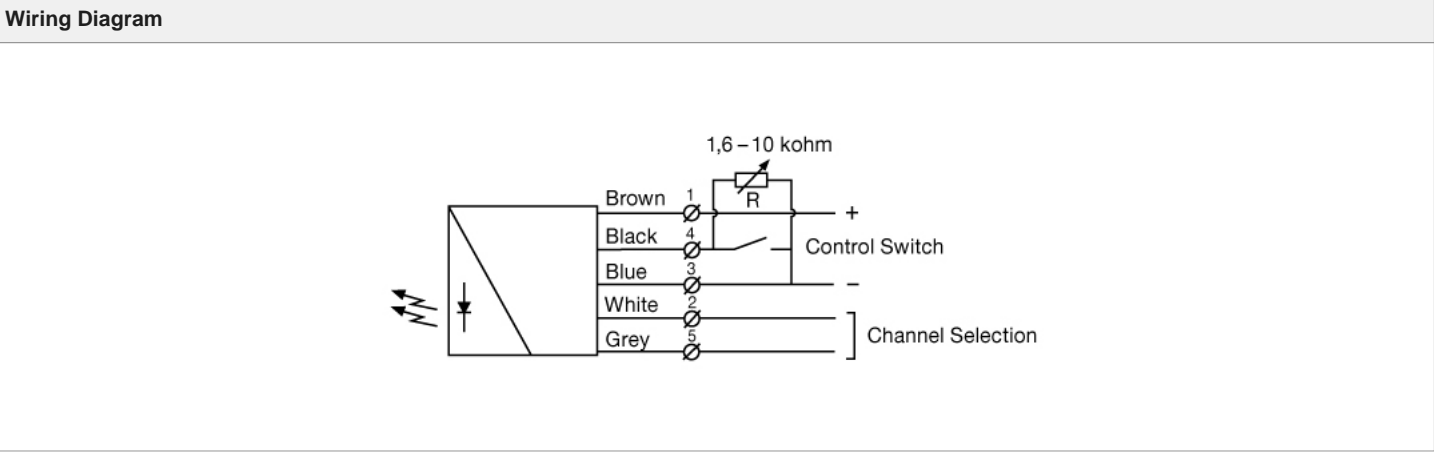


Angular Displacement

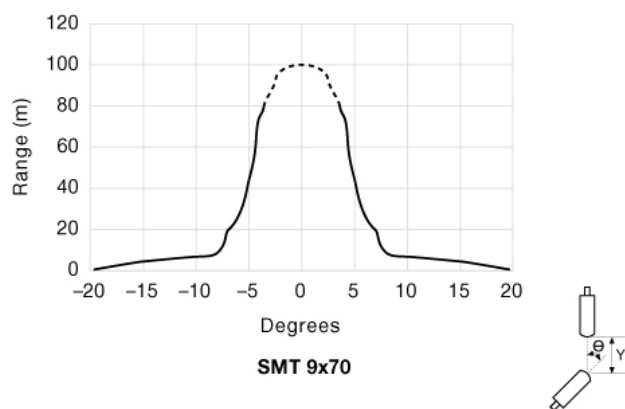

Dimensions

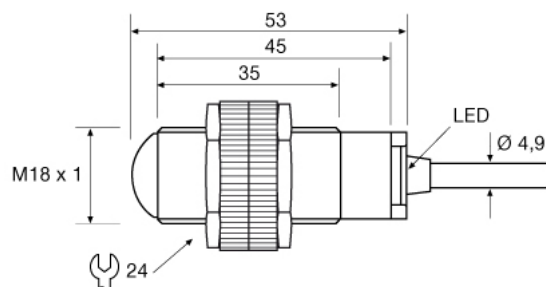

Excess Gain

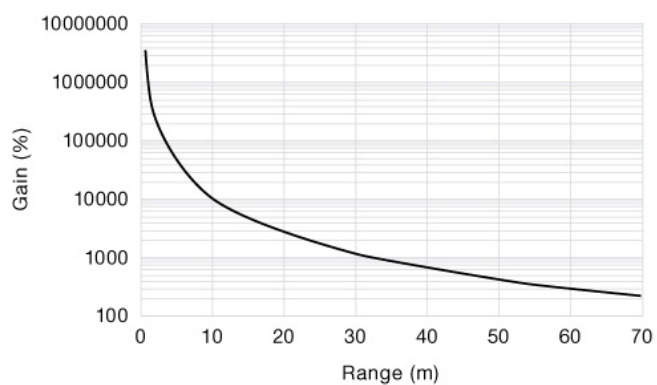

SMT 9070 and SMR 9x7x